


## Scope of Works

- 1 Form new infill extension at existing entrance (4.5m x 2.25m) to increase existing Library accommodation. Remove
  - existing dividing partition/walls to create open space. Remove extg. entrance approach ramp. Remove existing entrance lobby screen and and form seating area off Foyer.
- Create new service/FE corridor to rear of Library.
- Form new main entrance in extg. glazed screen and create new lobby with inner glazed doors/screen.
- **5** Re-configure existing WC facilities and form new unisex Access/Changing wc at 2.2m x 2.2m.
- Re-configure existing Kitchen with new walls to provide additional storage/access from Foyer.
- 7 Enlarge existing store off Main Hall (chair store).
- 8 Extend/continue existing corridor link to car park elevation.
- 9 Remove Bar/Servery division wall to form additional Main Hall storage.
- 10 Create Meeting Room (former stage equipment store) including new rooflights.
- Form new infill extension to south-east corner (4.275m x 5.250m) to create new Parish Office complete with Access WC; Kitchen; Utility and dedicated storage as back-up facilities. Remove extg. stage level FE door and external concrete landing/steps.
- 12 To new Parish Office,in extg. wall form new entrance access door with glazed side screen. Form timber stud and plasterboard full height dividing partition between Parish Office and Main Hall.

## Schedule of Rooflights

- (A) 1200mm x 1200mm Velux CUU 120120 022 OQ. Integra Opening
- (B) 1000mm x 2000mm Velux CUU 200100 022 OQ. Integra Opening
- (C) 3no. 1200mm x 1200mm Velux CFP 0073QV. Fixed (Non-Opening)
- D Replacement Rooflights in Existing Openings Velux (600mm x 600mm) Ref: CFP - Fixed (Non-Opening)

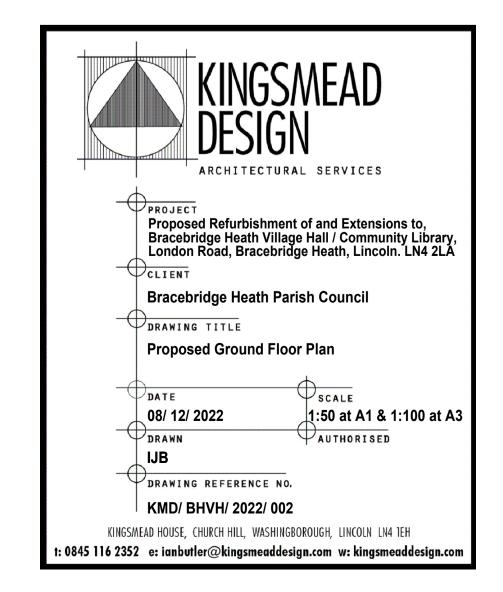

SCALE 1:50 1 2 3 4 5 metres